



The germ catcher

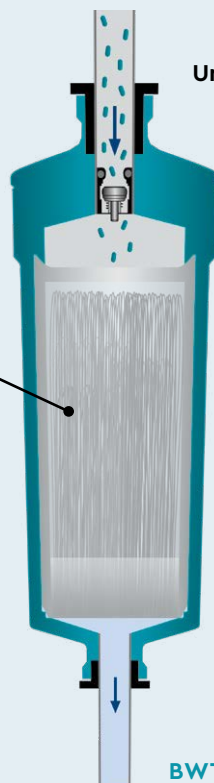

COMPACT PROTECTION FOR WATER DISPENSERS AND ALL DRINKING WATER SYSTEMS

The high quality of drinking water in Europe is ensured by legal regulations and the regular inspection of waterworks. However, even good drinking water can be affected by surprising problems, such as the sudden ingress of particles or bacterial contamination. The cause of these issues is sometimes the public pipeline network and other times the installations in the affected building. No matter what the underlying problem is, drinking water systems and water dispensers then quickly become full of germs and have to be thoroughly cleaned. This is where BWT bestcare MINI offers optimum protection, safely removing bacteria and particles from the water. BWT bestcare MINI is like insurance cover for your water!



Where can BWT bestcare MINI be used?

BWT bestcare MINI is the ideal solution for all water dispensers and drinking water systems, but it can also be used wherever cold water has to be safe to drink directly at the point of consumption.

Hollow-fibre membrane filter
with 0.02 µm pore size
to remove bacteria and
particles



Untreated water (with bacteria and particles)

 Particles
 Bacteria

BWT BESTCARE MINI FILTER CARTRIDGE

Filtered water (free of bacteria and particles)

SPECIFICATIONS

| Filter size | MINI |
|-------------------------------|------------------|
| Maximum use [litres/months] | 6,000/6 months |
| Nominal flow rate [l/h] | 300 |
| Connection thread (in/out) | 8 mm (push lock) |
| Total length (A) in mm | 175 |
| Ø filter cartridge (B) in mm | 60 |
| Installation length (C) in mm | 175 |
| Weight in kg (dry/wet) | 0.3/0.5 |
| Order no. filter cartridge | FS10B00A00 |

Subject to change.

BWT BESTCARE MINI - THE GERM CATCHER

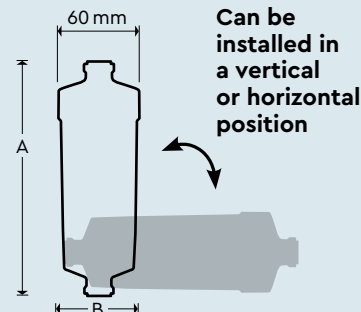
Main advantages

- Protection of downstream equipment such as drinking water dispensers
- Perfect prevention against bacterial growth
- Consistently high water quality

Technical features

- Hollow-fibre membrane filtration with 99,9999 % (log 6) retention of bacteria
- Ideal for separation of particles
- Retention of microplastics
- Space-saving design with compact connection technology

Connection: 8 mm (push lock)



OPERATING CONDITIONS

| | |
|----------------------|---------|
| Inlet pressure: | 2-8 bar |
| Water temperature: | 4-30 °C |
| Ambient temperature: | 4-40 °C |



ALTERNATIVE PRODUCT

| | Description | Order number |
|------------------------|---|--------------|
| BWT bestcare 10 | BWT bestcare 10 is suitable for all water dispensers and drinking water systems – wherever cold water has to be safe to drink directly at the point of consumption. | 125501411 |



MANUFACTURER:

BWT Holding GmbH:
Walter-Simmer-Str. 4
5310 Mondsee, Austria
BWT-WAM.COM

SALES:

**BWT water+more
Deutschland GmbH:**
info@water-and-more.de
Tel.: +49 611 58019-0

